BLANKOM®

Professional Headend Solutions

Operating instructions

Power supply module (9 amps)

HELIOS-P1
Part N°: 5150.10

...Setting Signals

Contents

1. Safety and operating instructions 3
2. Device variants 3
3. General 3
4. Front view 3
5. Functional description 4
6. Meaning of status LED‘s 4
7. Technical data 4
8. Bibliography 5
9. Document history 5

1. Safety and operating instructions

When assembling, starting-up and adjusting the modules, it is necessary to consider the system specific references in the manual instruction.

The modules may only be installed and started up by authorized technical personnel.

When assembling the modules into the receiving points, the adherence of the EMC regulations is to be secured.

The assembly and wiring have to be done without voltage.

All active modules may only be operated with the power supply HELIOS or HELIOS-P1.

The main voltage and the operating voltage of the modules working by DC have to be in complience to the operating parameters described in the technical data.

With all work the defaults of the DIN EN 50083 have to be considered. Especially the safety relevant execution of the DIN EN 60728-11[1] is necessary.

The HELIOS-P1 module comes under protection classification I. It is absolutely necessary, therefore, to insert the mains plug into a fused socket.

The ventilation slots of the modules are to be kept absolutely free.

WEEE-Reg.-Nr. DE 50389067

2. Device variants

HELIOS-P1	5150.10	Power supply (9 amps, 100 ... 240 V~ input)

3. General

The Smart Business Line (SBL) is a modern head end system, that is distinguished by its modular and compact design. A user-friendly operating concept facilitates setup, configuration and maintenance of the system.
The HELIOS-P1 is a power supply (9 amps) of the SBL. The status of the module will be displayed by LED‘s.

4. Front view

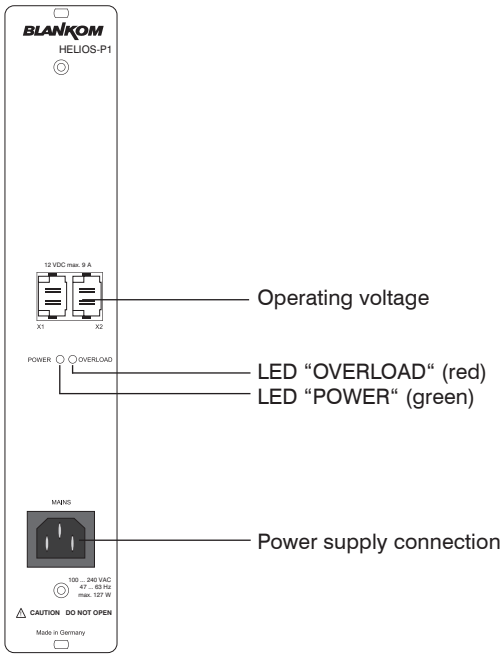

5. Functional description

The HELIOS-P1 module is the power supply of the processing units (modules). The total power consumption of all connected modules may not exceed the current limit of the HELIOS-P1. The unit has an over-voltage protection (shutdown). Increases the output voltage to 14 V by a malfunction of the power supply (eg interruption of the controlled system), then an independent monitoring circuit is activated and turns off the power. Erasing this state is only possible by separating the power supply from the mains. After a required latency of around 1 ... 2 minutes, the control circuit is reset and power supply can be connected to the mains. If the malfunction is still not resolved, then the described process is repeated again.
The HELIOS-P1 is insensitive to load-side external voltages, because power and energy are limited by a suppressor diode. The start-up takes place under all load conditions and a capacitive loads up to 12 000 uF across the overall temperature range. The unit has an inrush current, which is engaged actively and is limitting consumtion to 50 A during hot and cold start, and power interruptions.

6. Meaning of status LED‘s

Designation	Colour	Status	Meaning of display
POWER	green	permanently on	Unit is ready.
		off	Unit is off, operating voltage not applied
OVERLOAD	red	permanently on	Overload on the output (for example to many consumers)
		off	Load is within limits

7. Technical data

Electrical characteristics

Main voltage	100 ... 240 V, (+10%/ - 5%)
Mains frequency	47 … 63 Hz
Mains connector	built in connector according DIN EN 60320-1 (IEC 60320 C14) [3]
Power consumption	max. 127 W
Output voltage	12 V
Ripple noise ratio	66 dB
Current drain	max. 9 A
Current limit	yes (10 A typical)
Short circuit protection	yes
Overvoltage protection	yes (≤ 14.5 V)*
Internal fuse	G5 x 20, T4A (IEC 127-2/ V)
Protection class	I according DIN EN 61140 (VDE 0140-1) [4]
Protection standard	IP 20
Radio noise suppression	according DIN VDE 0871 (curve B) [5]

Environmental conditions

Temperature range	-10 … +55 °C
Relative humidity	≤ 80 % (not condensing)
Mounting method	vertical
Mounting location	splash-proof and drip-proof

Miscellaneous

Dimensions (l x w x h)	46 x 262 x 167 mm
Weight	ca. 1,200 g

Delivery contents

1x power cord
1x DIN rail clip
1x mounting accessories
2x dummy connector

* To reset device interrupt the mains voltage 2 minutes!

8. Bibliography

[1] EN 60728-11: Cable networks for television signals, sound signals and interactive services Part 11: Safety (IEC 60728-11:2005); German version EN 60728-11:2005

[2] EN 50083-2 : Cabled distribution systems for television and sound signals. Electromagnetic compatibility for equipment; EN 50083-2:2001

[3] EN 60320-1: Appliance couplers for household and similar general purposes Part 1: General requirements (IEC 60320-1:2001 + A1:2007); German version EN 60320-1:2001 + A1:2007, Corrigendum to DIN EN 60320-1 (VDE 0625-1):2008-05

[4] DIN EN 61140; VDE 0140-1: Protection against electric shock - Common aspects for installation and equipment (IEC 61140:2001 + A1:2004, modified); German version EN 61140:2002 + A1:2006

[5] DIN VDE 0871: Radio noise suppression of high frequency units, Determination of limits for industrial, scientific and medical equipment, identical with CISPR 23 :1987

9. Document History

Version	Date	Modification	Author
1.00	07.03.2012	basic document	Häußer

Options available upon request! Subjects to changes due to technical progress.

BLANKOM *Antennentechnik GmbH*
Hermann-Petersilge-Straße 1 • 07422 Bad Blankenburg • Germany • Phone +49 (0) 3 67 41 / 60-0 • Fax +49 (0) 3 67 41 / 60-100

CE Declaration of Conformity

The Manufacturer

BLANKOM Antennentechnik GmbH · Hermann-Petersilge-Str. 1 · 07422 Bad Blankenburg · Germany

herewith declares the conformity of the product

Product name:	Power supply module (9 amps)
Type:	HELIOS-P1
Product number:	5150.01

according to the following regulations

EN 50083-2
EN 60728-11 (as far as relevant)

and additional device-specific regulations, enclosed above, which this product is subjected to.

Date: 07.03.2012

Signature:

Piero Kirchner
(Managing Director)